

SILKY LUSH

100% PES
shag
high pile height

SILKY LUSH

SOFT ORIGINS COLLECTION



REMINISCENT OF THE
LOOK AND FEEL OF
TRADITIONAL SILK,
THE SUBTLE COLOUR
PALETTE AND LUSH
STRUCTURE OF
THIS UNICOLOURED
CUT-PILE CARPET
TRANSFORMS YOUR
ROOM INTO A COSY
LUXURIOUS COCOON.

SILKY LUSH


SOFT ORIGINS COLLECTION

COLOURS

Standard neutrals & colourful

WIDTH

4 m

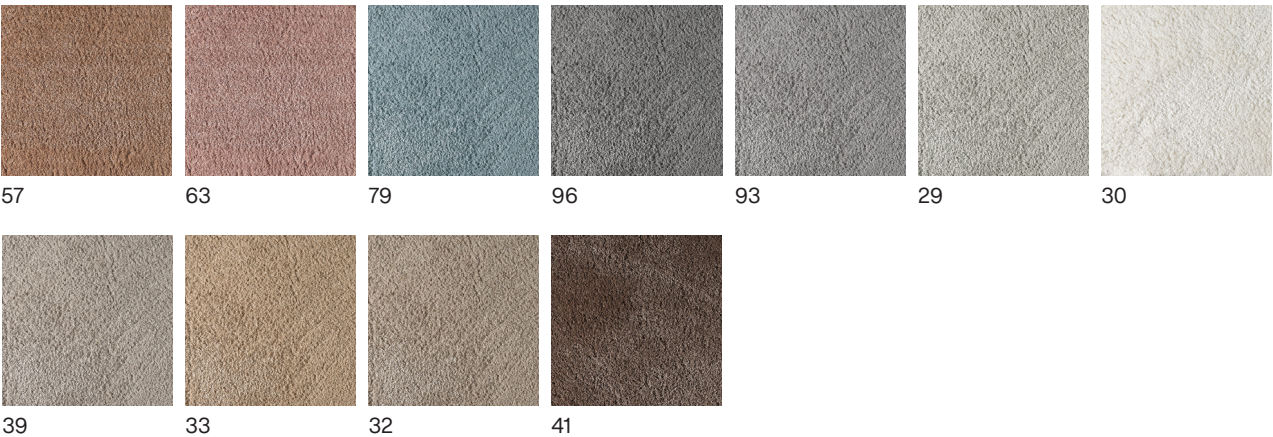

PRODUCT FEATURES

STRUCTURE	PILE HEIGHT	YARN	PERFORMANCE	BACKING
Average cut pile	High	100% PES	Medium domestic	Twin back

For further general information, check our technical document.

USAGE



UNDERFLOOR
HEATING



* The technical information contained in this document is for general information purposes only, without having the intention to be exhaustive and at all times up to date. Whilst we endeavor to keep the information correct and up to date, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, the up to date character, reliability, suitability or availability with respect to the information contained in this document for any purpose. Any reliance you place on such information is therefore strictly at your own risk.

SILKY LUSH

SOFT ORIGINS COLLECTION

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufting 1/8" cut pile Tufté 1/8" cut pile Getuftet 1/8" cut pile Getuft 1/8" cut pile	FASTNESS TO LIGHT SOLIDITÉ A LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	EN ISO 105-B02 ≥ 5-6
PILE MATERIAL COMPOSITION DU VELOURS POLMATERIAL POOLMATERIAAL	100% PES	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4-5
SECONDARY BACKING DOSSIER RÜCKEN TAPIJTRUG	Twin back	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 E _{FL} -s1
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	± 1.540 gr/m ²	WIDTH LARGEUR BREITE BREEDTE	EN ISO 3018 ca. 400 cm
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	± 2.400 gr/m ²		
PILE THICKNESS EPAISSEUR DU VELOURS POLDICKE POOLDIKTE	± 9,6 mm		
TOTAL THICKNESS EPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	± 12,5 mm		
TUFT DENSITY NOMBRE DE POINTS NOPPENZAHL AANTAL PUNTEN	± 121600/m ²		
PRODIS / GUT	9914B5FD		
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 22 - LC5	 0,25	



ITC CO BV
Kanegemstraat 15, B-8700 Tielt
itc-carpets.com

EN 14041
CE
19
ITC CO BV Kanegemstraat 15 - BE 8700 Tielt
DOP: 1011#IN00EL
Textile Floor Covering EN 1307
    
my.itc-carpets.com



9914B5FD

SILKY LUSH WFB

GUT-Certificate

The named article fulfils the test criteria of the
GUT - Gemeinschaft umweltfreundlicher Teppichboden e. V.

Pollutants

The bans on use and limit values for harmful substances specified in the GUT criteria, in particular SVHCs, dyeing accelerators, azo dyes, allergenic and carcinogenic dyes, heavy metals, chlorophenols (e.g. PCP), biocidal substances, phthalates and other plasticisers, halogenated flame retardants and Sb_2O_3 as well as inorganic fibres (asbestos), were complied with.

Formaldehyde

The ban on the use of auxiliaries containing or releasing formaldehyde was complied with. The formaldehyde emissions are $< 10 \mu\text{g}/\text{m}^3$.

Newness odour

The article has passed the odour test with a score of at least 3. A slight new odour of low intensity is permissible.

Recycled materials

The requirements regarding pollutant content and emission behaviour also apply without restriction to products made from recycled materials. The use of recycled raw materials (e.g. pile fibres) must be indicated by the manufacturer when registering the article.

Unit: [$\mu\text{g}/\text{m}^3$]	3 d	28 d
TVOC (C₆-C₁₆)	250	100
SVOC (C₁₆-C₂₃)	30	30
VOC (no LCI)	100	50
R-Value	< 1	< 1
HCHO	10	4
Benzene	n.d	
CMR substances	n.d	

VOC emissions

The limit values for VOC emissions, determined according to the test chamber method in accordance with EN 16516, were complied with. The test was carried out 3 days or, if necessary, 28 days after placement in the chamber. The current EU LCI-list was used to evaluate the emissions and calculate the R-value.

A complete list of all limit values
can be found at
gut-prodis.eu or gut-ev.de

Aachen, den 06.09.2019

Gemeinschaft umweltfreundlicher Teppichboden e.V.

D-52068 Aachen Schönebergstr. 2
mail@gut-ev.de / +49 241 96843411



GUT-Safety Code



gut-prodis.eu